

LEVELUP LIGHTING

LED FLAT PANELS

models

2x2 - 15/20/30/40/50 Watts

2x4 - 20/30/40/50/75 Watts

Watts Tunable

6x CCT Color Selectable

**COMMERCIAL GRADE
PREMIUM FIXTURE**



+615-948-2324

www.LevelUpLighting.com



PROJECT

LED FLAT PANELS

DESCRIPTION

Our 2x2 and 2x4 LED flat panels combine efficiency, flexibility, and clean design to meet the demands of modern commercial spaces. DLC Premium 5.1 certification ensures maximum performance and rebate eligibility, while the 6-position CCT switch allows contractors to select the perfect color temperature on site. Engineered for seamless installation in standard grid ceilings, these panels provide uniform, glare-free illumination that elevates offices, schools, retail, and healthcare environments. As a direct replacement for fluorescent troffers, they reduce energy consumption, simplify inventory, and deliver long-lasting reliability.



Models

KEY FEATURES

Watt Tunable	15/20/30/40/50	20/30/40/50/75
Color Tunable CCT	3000/3500/4000/5000/5700/6500 (6x CCT)	
High Lumen Output	~6,500 Lumens	~9,750 Lumens
Certifications	DLC Premium 5.1, ETL Intertek	
Warranty	5 Years/50,000 Hrs.	
Compatibility	Designed for standard drop-ceiling lay-in installations (fits T-grid ceilings)	





PROJECT LED FLAT PANELS

ELECTRICAL

Input Voltage	120-277v
Power Factor	>0.9 Efficient Power
THD	<20%
Luminous Efficacy	~130 Lm/w
Dimming	0-10V standard
IP Rating	IP20



OPTICAL

CRI	≥80
Beam Angle	~120°
Lens	Back-lit

PHYSICAL SPECIFICATIONS

Model	2x2	2x4
Dimension	23.74" x 23.74" x 1.47"	47.72" x 23.74" x 1.47"
Weight	4.5 LBS	8.5 LBS
Operating Temp	-40°F to 104°F	

PACKAGING



Model	FP2x2	FP2x4
Qty Per Box	4	4
Gross Weight	18 LBS	35 LBS
Dimensions	25.2" x 6" x 25.2"	50.7" x 3" x 26"
Storage Temp	-40°F - 176° F	





PROJECT LINEAR HIGH BAY

DIMENSIONS

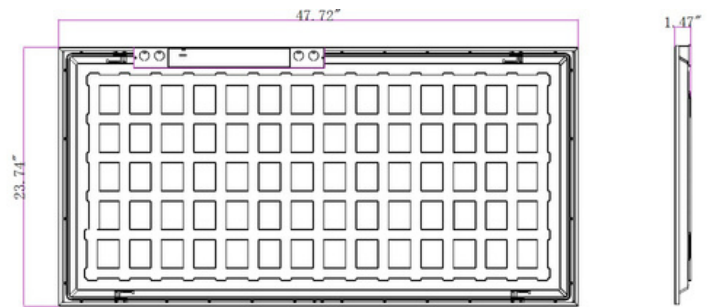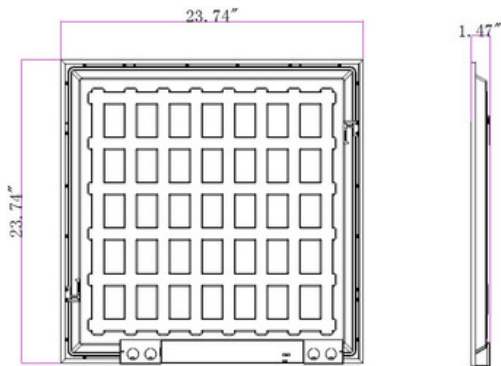

- Waffle Stamping-Increases heat dissipation & driver life
- Seismic Clips Included
- Non-yellowing Prismatic Lens
- Less than 1.5" deep- Ideal for plenum area

