LEVELUP

LED TROFFERS

Models

2x2 - 15/20/30/40/50 Watts

2x4 - 20/30/40/50/75 Watts

Watts Tunable

5-6x CCT Color Selectable

COMMERCIAL GRADE
PREMIUM FIXTURE







+615-948-2324

www.LevelUpLighting.com




LED FLAT PANELS

DESCRIPTION

These LED troffer panels feature a sleek, modern design that fits seamlessly into standard T-grid drop ceilings, offering both 2×2 and 2×4 options. They provide adjustable colour tuning between 3000 K and 6500 K and smooth 0-10 V dimming, making them ideal for offices, classrooms, retail stores and healthcare facilities. With DLC Premium, ETL and UL listings, universal 120-277 V operation, integrated surge protection and a five-year/50 000-hour warranty, they deliver reliable, energy-efficient performance in any drop-ceiling



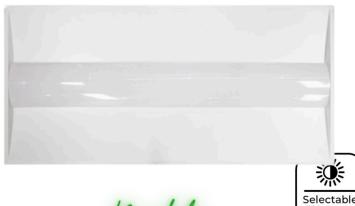

KEY FEATURES

	Mo	dels	
15/20/30/40/50			2

Watt Tunable	15/20/30/40/50	20/30/40/50/75
Color Tunable CCT	3000-6500K CCT 5x	3000-6500K CCT 6x
High Lumen Output	~6,500Lumens	~9,700 Lumens
Certifications	DLC Premium 5.1, ETL Intertek	
Warranty	5 Years/50,000 Hrs.	
Compatibility	Designed for standard drop-ceiling lay-in installations (fits T-grid ceilings)	

















LED FLAT PANELS

ELECTRICAL

Input Voltage	120-277v
Power Factor	>0.9 Efficient Power
THD	<20%
Luminous Efficacy	~130 Lm/w
Dimming	0–10V standard
IP Rating	IP20









CRI	≥80
Beam Angle	~120°
Lens	Prismatic



PHYSICAL SPECIFICATIONS

Model	2x2	2x4
Dimension	23.74" x 23.74" x 2.15"	47.75" x 23.74" x 2.15"
Weight		8.5 LBS
Operating Temp	-40°F to 104°F	

PACKAGING

Model	FP2x2	FP2x4
Qty Per Box	4	4
Gross Weight	11 LBS	48 LBS
Storage Temp	-40°F - 176° F	











